


Product Data Sheet Type: SI4018-S

Group: ACCESSORIES Thermal Interface Material

Silicone washers

Thickness : 0,18
Dielectriccoefficient : 2,56 at 1MHz
Device mounted by : Clip Mounting|Bonding
Material : Silicon w. Glasfibre

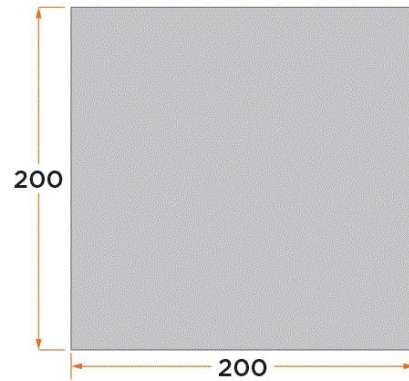

Laboratory board in dimension 200 x 200 mm.

Glass fiber reinforced silicone foil in combination with bushes facilitate insulated mounting of semiconductors e.g. on heatsinks. They are highly flexible and ensure optimal heat conductivity even without using thermal compounds.

- Custom designed in all configurations (on request).
- Cost saving assembly of different components onto a common insulator wafer.
- self-adhesive on one side
- Thickness: 0,18mm
- Dielectric strength: app. 4 KV
- Dielectric constant: 2,56 (by 10^6 Hz)
- Hardness: (Test ASTM D 2240) 85 Shore A
- Elongation: (Test ASTM D 412) 2%
- Colour: grey
- Tolerance: +/-0,02mm
- Temperature range: -60 / +200 °C
- Thermal Conductivity: 0,9 W / mK
- UL listed

